



"COLD-FLEX"
MATERIALS





EASY SLIDE



WATER

tigerflex®

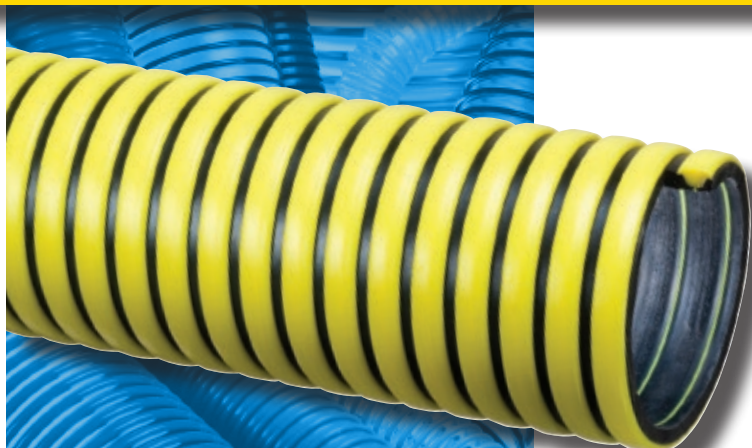

Made in USA

Tiger™ Yellow TY™ Series EPDM Suction Hose

General Applications:

- Agriculture liquid fertilizers
- Irrigation lines
- Liquid manure handling
- Marine bilge discharge
- Pumps, rental and construction dewatering
- Pumps, trash
- Septic and wastewater handling
- Used frack solution removal
- Water suction – standard duty

Construction: EPDM tube with polyethylene helix.

Service Temperature: -40°F (-40°C) to 160°F (+71°C)*

Features and Advantages:

- **Superior Rubber Compounds** – Tigerflex™ uses only the best available EPDM compounds, which provide the ideal combination of light-weight, flexibility, durability and chemical resistance.
- **Superior Flexibility** – Our tests show up to 22% more flexible than the competition, especially in sub-zero weather! Tiger™ Green comes off the trucks more flexible and easier to handle than other similar hoses.
- **Easy Slide Helix** – Rigid helix design protects hose tube from cover wear, and allows hose to slide easily over rough surfaces and around corners. Easy-to-handle.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **"Cold-Flex" Materials** – Hose remains flexible in sub-zero temperatures.

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Approx. Bending Radius (@ 68°F)	Standard Length (ft.)	Weight (lbs./ft.)
					68°F	104°F	68°F	104°F			
TY100	1	25.4	1.40	35.5	65	45	FULL	28	2	100	0.28
TY125	1¼	31.8	1.63	41.4	60	40	FULL	28	3	100	0.33
TY150	1½	38.1	1.93	49.0	50	35	FULL	28	3	100	0.44
TY200	2	50.8	2.51	63.8	50	35	FULL	28	5	100	0.67
TY300	3	76.2	3.60	91.5	45	30	FULL	26	7	100	1.14
TY400	4	101.6	4.70	119.5	40	25	FULL	26	11.5	100	1.84

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 62.

*Actual service temperature range is application dependent.

RoHS(11)

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.

KTCA0116